
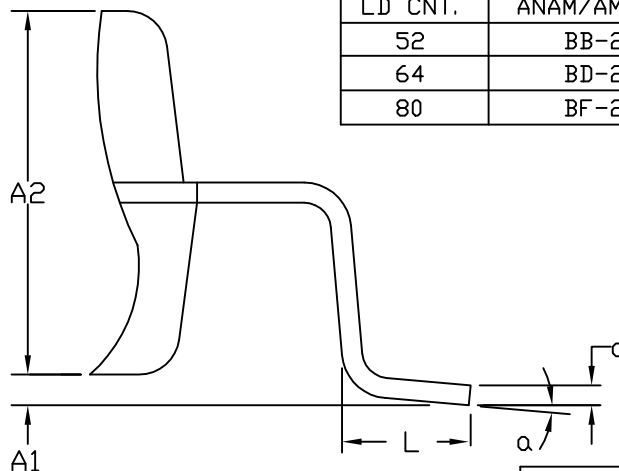


TOP VIEW

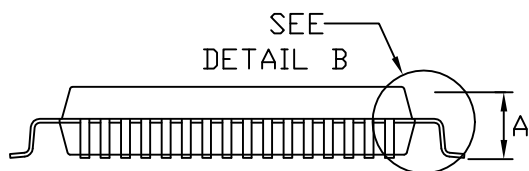

DETAIL "B"

SYMBOL	VARIATIONS					
	BB-2		BD-2		BF-2	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
A	$\overline{\curvearrowright}$	3.00	$\overline{\curvearrowright}$	3.00	$\overline{\curvearrowright}$	3.00
A ₁	0.10	0.25	0.10	0.25	0.10	0.25
A ₂	2.55	2.75	2.55	2.75	2.55	2.75
D	17.20	BSC.	17.20	BSC.	17.20	BSC.
D ₁	14.00	BSC.	14.00	BSC.	14.00	BSC.
D ₂	12.00	BSC.	12.00	BSC.	12.35	BSC.
Z _D	1.00	REF.	1.00	REF.	0.825	REF.
E	17.20	BSC.	17.20	BSC.	17.20	BSC.
E ₁	14.00	BSC.	14.00	BSC.	14.00	BSC.
E ₂	12.00	BSC.	12.00	BSC.	12.35	BSC.
Z _E	1.00	REF.	1.00	REF.	0.825	REF.
L	0.73	1.03	0.73	1.03	0.73	1.03
N	52		64		80	
e	1.00	BSC.	0.80	BSC.	0.65	BSC.
b	0.35	0.50	0.30	0.45	0.22	0.38
c	0.13	0.23	0.13	0.23	0.13	0.23
a	0°	7°	0°	7°	0°	7°

LD CNT.	ANAM/AMKOR	JEDEC MQ-108	JEDEC MS-022
52	BB-2	BB-2	BD
64	BD-2	BD-2	BE
80	BF-2	BF-2	BF

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .254mm (.010").
3. CONTROLLING DIMENSION: mm.
4. MEETS JEDEC MQ-108 AND MS-022.

MAXIM
 PROPRIETARY INFORMATION
 TITLE:
 PACKAGE OUTLINE, MQFP, 14X14mm
 APPROVAL: _____ DOCUMENT CONTROL NO. 21-7005 REV A 1/1